




'WHEN ONLY THE BEST WILL DO'

ITEM SYAM ELITE 10 BURNER
STAINLESS 304 GAS MOBILE BBQ /
BRAAI

MODEL CPBISAB4SR

STYLE OUTDOOR MOBILE 10 BURNER
BBQ DOUBLE LAYER STAINLESS
DOME AND FULL SIZE GREASE
TRAY WITH EASY READ HEAT
INDICATOR. SIDE SIMMER, FISH
SHAPED & 2 WOK BURNER. GAS
CYLINDER HOUSED INSIDE BBQ

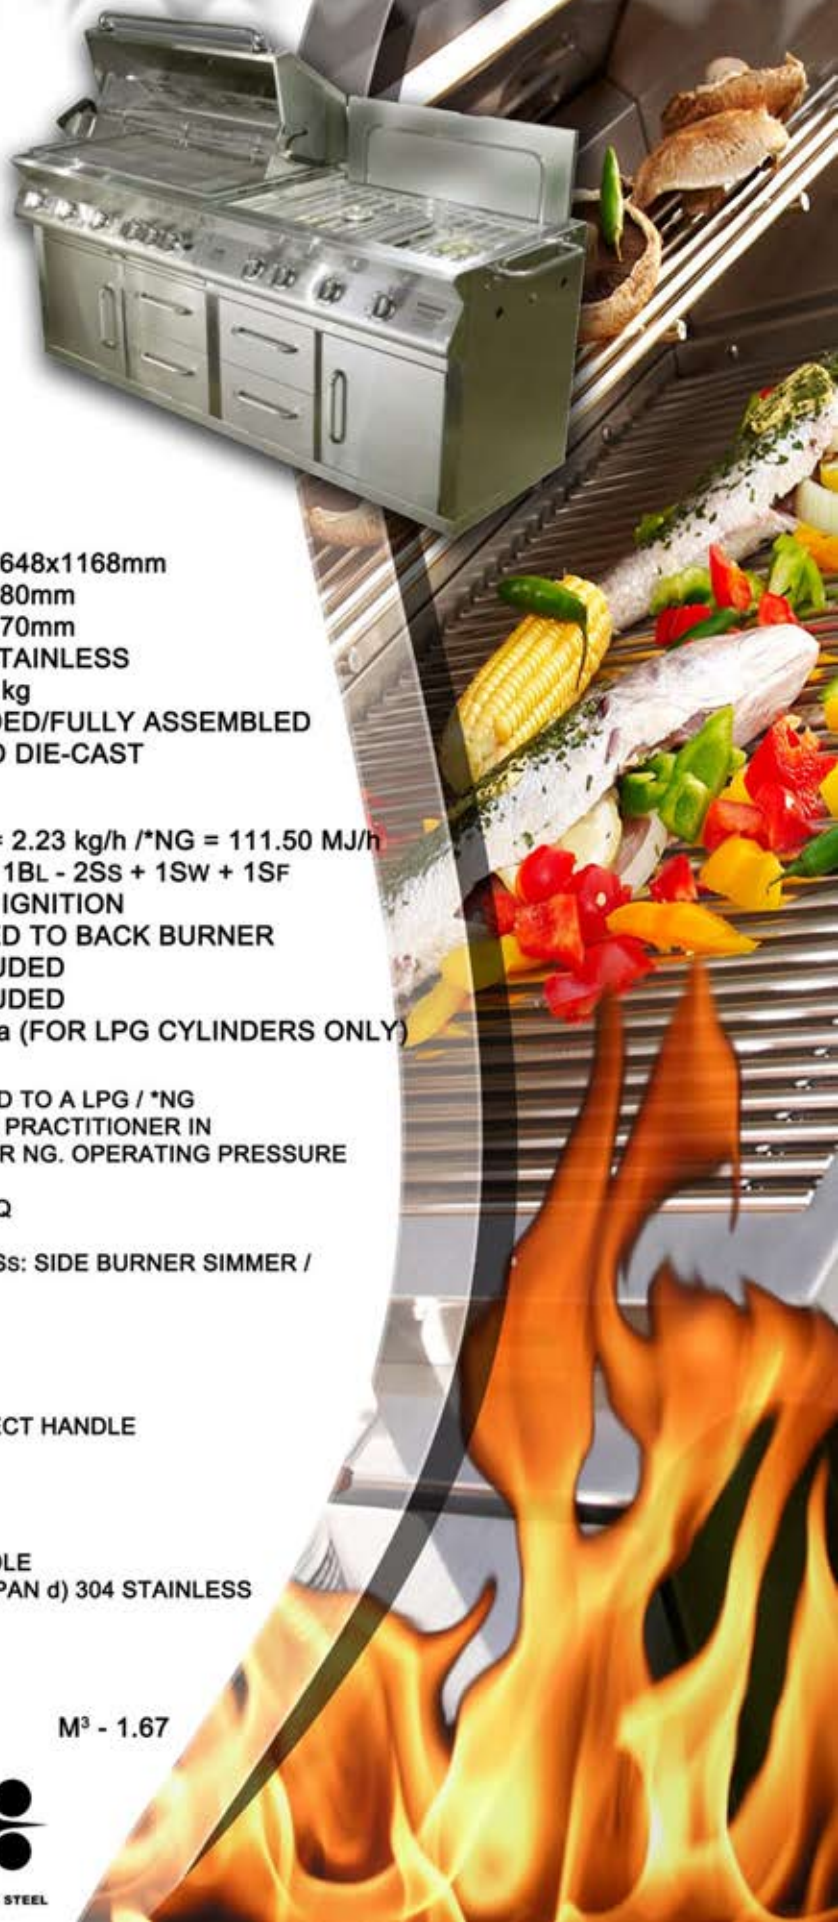

DESIGN

| | |
|------------------------------|------------------------|
| DIMENSIONS (LxWxH) | 2228x648x1168mm |
| GRILLING AREA (6 BURNERS) | 810x480mm |
| SIDE COOKING AREA (4 BURNER) | 770x470mm |
| MATERIAL | 304 STAINLESS |
| WEIGHT | 144.0 kg |
| STRUCTURE | WELDED/FULLY ASSEMBLED |
| CONTROL KNOBS | SOLID DIE-CAST |

DETAIL

| | |
|---|-------------------------------------|
| MAX GAS CONSUMPTION & FUEL TYPE (SEE*1) | LPG = 2.23 kg/h / *NG = 111.50 MJ/h |
| BURNER DEPLOY (SEE*2) | 5Mi + 1BL - 2Ss + 1Sw + 1SF |
| IGNITION SYSTEM (SEE*3) | SELF IGNITION |
| SAFETY FAILURE DEVICE | FITTED TO BACK BURNER |
| ROTISSERIE KIT (SEE*4) | INCLUDED |
| COVER (SEE*5) | INCLUDED |
| GAS REGULATOR INCLUDED | 2.8kPa (FOR LPG CYLINDERS ONLY) |

*1 MINIMUM LPG SUPPLY IS 9kg GAS CYLINDER. IF CONNECTED TO A LPG / *NG INSTALLATION MUST BE DONE BY A SAQCC REGISTERED GAS PRACTITIONER IN ACCORDANCE WITH SANS 10087-1 FOR LPG AND SANS 827 FOR NG. OPERATING PRESSURE FOR LPG IS 2.8kPa / NG IS 2.0 kPa
*NG REQUIRES A JET CONVERSION KIT PACKED WITH THE BBQ

*2 Mi: SS I-SHAPED MAIN BURNER / BL: BACK LONG BURNER / Ss: SIDE BURNER SIMMER / Sw: SIDE BURNER WOK / SF: SIDE FISH SHAPED BURNER
THE DIGIT DENOTES THE NUMBER OF BURNERS

*3 BUILD-IN FIRE ARM WITH PIEZO SPARK IGNITION SYSTEM

*4 COMPRISING OF a) DC MOTOR b) HEX ROD c) QUICK CONNECT HANDLE
d) 2 x SINGLE SIDED SPITS e) BALANCE COUNTER WEIGHT

*5 PVC WITH COTTON LINER

*6 OPTIONAL ACCESSORIES a) CAST IRON REVERSIBLE GRIDDLE
b) 304 STAINLESS BRAAI PAN c) 304 STAINLESS 375 STIR FRY PAN d) 304 STAINLESS 750 STIR FRY PAN e) DOUBLE SIDED SPIT

PACKAGING

1 BOX 174.5 kg (LxWxH) - 1840x720x1270mm M³ - 1.67



REV 2.1



